


5-Port 10/100 Switch

C-0555

The C-0555 5-port 10/100 Switch provides you with a high-performance, low-cost, easy-to-use, seamless and standard upgrade to improve a network to 100Mbps. All 5 ports support auto MDI/MDIX, there's no need to worry about the cable type, simply plug and play. Moreover, with the innovative energy-efficient technology, the C-0555 5-port 10/100 Switch can save up to 60% of the power consumption compared to the competition.

FEATURES

Innovative energy-efficient technology saves power up to 60%
Supports IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode
Non-blocking switching architecture that forwards and filters packets at full wire-speed for maximum throughput
Auto-MDI/MDIX eliminates the need for crossover cables
Supports MAC address auto-learning and auto-aging
Auto-negotiation ports provide smart integration between 10Mbps, 100Mbps and 1000Mbps hardware

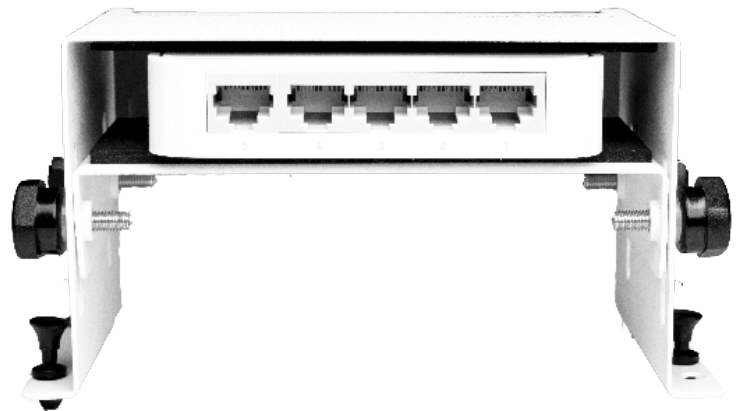

SPECIFICATIONS

Interface: (5) 10/100Mbps RJ45 Ports
External Power Supply: 100-240VAC, 50/60Hz
Dimensions (W x D x H): 4.1 x 2.8 x 0.9 in. (103.5 x 70 x 22mm)
Fan Quality: Fanless
Transfer Method: Store and Forward
Advanced Functions: Green Technology, saving power up to 60%, 802.3X Flow Control, Back Pressure Auto-Uplink Every Port

Certification: FCC, CE, RoHs
System Requirements: Microsoft® Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, MAC® OS, Netware®, UNIX® or Linux
Environment: Operating Temperature: 0°C-40°C (32°F-104°F)
 Storage Temperature: -40°C-70°C (-40°F-158°F)
 Operating Humidity: 10%-90% non-condensing
 Storage Humidity: 5%-90% non-condensing



Surveillance Systems



Structured Wiring



Intercom & Telephone Entry Systems



IR Remote Control Distribution



Audio & Video Distribution